



Compact lighting apparatus made up of aluminum illuminator covered by anti-heat ABS case, 3 power LED sources with 8°-25°-40° lens, head swivel, aluminum base with fastening holes, unipolar switch positioned back on the head lamp. External led driver 230Vac 350mA.



**Applications:** particularly suitable for the lighting of sewing machines, stitching machines, work benches.

**ELECTRICAL FEATURES**

Current	350mA cost dc
Power	3 W
IEC class	II (with led driver)
Power cable	PVC L1,5 m brown (+LED) - blue (-LED) output: under the base

**MECHANICAL AND OPTICAL FEATURES**

LED type	Power led
N. LED	3
LED lifetime	50.000 h
Lens	8°-25°-40°
Light colour	5000 K - CRI75
Fastening	4 screws
Switch	Unipolar on-off on the spot
Degree of protection	IP30
Colour	Black
Weight	0,70 Kg ~

**ORDER CODES**

Cod.	Power supply	Lens
LBC.3L.08.N	230Vac external led driver	8°
LBC.3L.25.N	230Vac external led driver	25°
LBC.3L.40.N	230Vac external led driver	40°


**LED DRIVER**

Artikel	Eigenschaften	
	Vin	I out DC
A0171005060503B	230Vac	350mA

**Flow light from working surface (40° lens)**

H 220mm		H 500mm	
Current	350mA	Current	350mA
ø (mm)	lux	ø (mm)	lux
60	10800	105	2280
120	3400	240	1180
180	1000	380	430

**Dimensions (mm)**

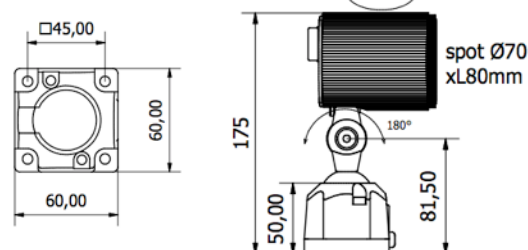

**Fastening accessories**



Clamp04



Magnetic plate B02