



Lighting apparatus made up of ABS illuminator, halogen light bulb 20W, glass protecting, head swivel, gooseneck arm covered by PVC sheath, ABS base with fastening holes and unipolar switch. Built-in electronic transformer. Power supply 230/380V.

CE   **IP20**



Applications: particularly suitable for the lightning of sewing machines, stitching machines and grinding machines.

ELECTRICAL FEATURES


| | |
|--------------|---|
| Power supply | 230/380 V |
| Power | 20 W |
| IEC class | II |
| Transformer | 230/12V onto lamp base - cod. A0391003060022C EL 380/12V onto lamp base - cod. A0031002110013D LAM |
| Power cable | PVC L1,5m with Schuko plug |

MECHANICAL AND OPTICAL FEATURES

| | |
|----------------------|-----------------|
| Light bulb type | Halogen 20W |
| Light bulb lifetime | 2000 h |
| Brightness | Narrow beam 38° |
| Light colour | 3200 K |
| Fastening | 4 screws |
| Switch | Unipolar on-off |
| Degree of protection | IP20 |
| Colour | Black - RAL7035 |
| Weight | 1,40 Kg ~ |

ORDER CODES

| Code | Power supply | L-arm | Color |
|---------------|--------------|-------|-------|
| P990.70.N | 230V | 700mm | Black |
| P990.70.B | 230V | 700mm | White |
| P990.70.380.N | 380V | 700mm | Black |
| P990.70.380.B | 380V | 700mm | White |

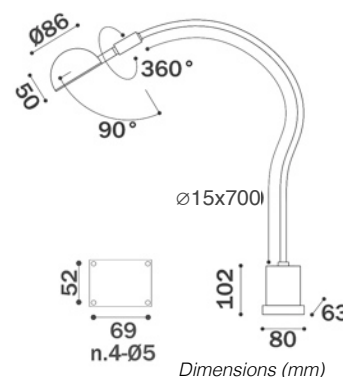

Flow light from working surface

H 220mm

H 500mm

| H 220mm | | H 500mm | |
|---------|----------|---------|----------|
| ∅ (mm) | lux | ∅ (mm) | lux |
| 140 | 4100 lux | 200 | 1330 lux |
| 200 | 2200 lux | 360 | 770 lux |
| 400 | 700 lux | 560 | 560 lux |

Fastening accessories



Clamp03



Magnetic plate B01