



Panel LED spot.

- Spot 1-3-6 led
- Narrow, medium and wide beam angle.
- Self-locking fastening system.
- Waterproof structure IP68.
- Integrated LED driver (IDS System). Only P1, separated LED driver.
- 24Vdc Power Supply.

Electrical features


Power Supply	24Vdc
LED driver	Integrated LED driver (IDS System). Only P1, separated LED driver.
IEC class	III

Optical and mechanical features

LED type	Power led
LED lifetime	50 000 h
Lens	8°-25°-40°; 60° P1 only
Light color	5000K CRI75
Structure	Anodized aluminum
Coverage	Tempered glass sp.4mm
Protection index	IP68
Lamp color	Black
Working temperature	-20 +55°C
Fastening	Self-locking system
Lamp-driver cable	H05RNF Neoprene cable 2x0,75mmq L = 1,5m

Model	Power Supply	N. of LED	Power Watt	Lumen led	Driver	Weight
P1.XX.24.XX	24Vdc	1	3W	170lm	A0321105070818B	0,20 Kg / 0,441 lb
P3.XX.24.XX	24Vdc	3	6W	450lm	IDS System	0,40 Kg / 0,882 lb
P35.XX.24.XX	24Vdc	3	6W	450lm	IDS System	0,40 Kg / 0,882 lb
P6.XX.24.XX	24Vdc	6	12W	900lm	IDS System	0,40 Kg / 0,882 lb

DIMENSIONS (all values in millimeters / inch)

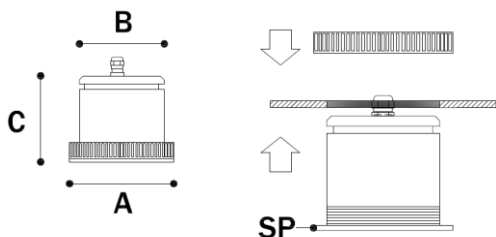

Model	A – mm / in	B – mm / in	C – mm / in	Sp. mm / in
P1.XX.24.XX	∅ 40 / 1,57	∅ 32 / 1,26	31,5 / 1,24	1,5 / 0,0591
P35.XX.24.XX	∅ 55 / 2,17	∅ 47 / 1,85	45 / 1,77	1,5 / 0,0591
P3.XX.24.XX	∅ 70 / 2,76	∅ 63 / 2,48	53 / 2,09	3 / 0,118
P6.XX.24.XX	∅ 70 / 2,76	∅ 63 / 2,48	53 / 2,09	3 / 0,118



Panel LED spot.

- Spot 1-3-6 led
- Narrow, medium and wide beam angle.
- Self-locking fastening system.
- Waterproof structure IP68.
- Separated LED driver.
- 230V 50/60Hz Power Supply.

Electrical features

Power Supply
 LED driver
 IEC class


230V 50/60Hz
 Separated LED driver
 II with driver

Optical and mechanical features

LED type
 LED lifetime
 Lens
 Light color
 Structure
 Coverage
 Protection index
 Lamp color
 Working temperature
 Fastening
 Lamp-driver cable
 Power cable

Power led
 50 000 h
 8°-25°-40°; 60° P1 only
 5000K CRI75
 Anodized aluminum
 Tempered glass sp.4mm
 IP68
 Black
 -20 +55°C
 Self-locking system
 H05RNF Neoprene cable 2x0,75 L = 1,5m
 PVC 1,5m with Euro plug

Model	Power Supply	N. of LED	Power Watt	Lumen led	Driver	Weight (without driver)
P1.XX.230.XX	230V 50/60Hz	1	3W	170lm	A0481005060806B	0,20 Kg / 0,441 lb
P3.XX.230.XX	230V 50/60Hz	3	6W	450lm	A0181005060705B	0,40 Kg / 0,882 lb
P35.XX.230.XX	230V 50/60Hz	3	6W	450lm	A0181005060705B	0,40 Kg / 0,882 lb
P6.XX.230.XX	230V 50/60Hz	6	12W	900lm	A0141005060709B	0,40 Kg / 0,882 lb

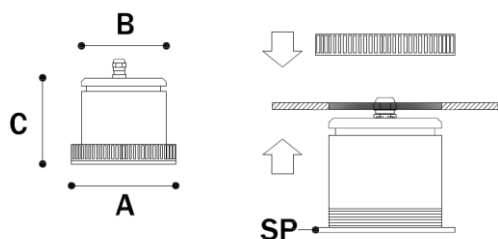DIMENSIONS (all values in millimeters / inch)

Model	A – mm/inch	B – mm/inch	C–mm/inch	Sp. mm/inch
P1.XX.230.XX	∅ 40 / 1,57	∅32 / 1,26	31,5 / 1,24	1,5 / 0,0591
P35.XX.230.XX	∅ 55 / 2,17	∅ 47 / 1,85	45 / 1,77	1,5 / 0,0591
P3.XX.230.XX	∅ 70 / 2,76	∅ 63 / 2,48	53 / 2,09	3 / 0,118
P6.XX.230.XX	∅ 70 / 2,76	∅ 63 / 2,48	53 / 2,09	3 / 0,118