



LED lamp for industrial machines.  
 Anodized aluminum structure with glass protection 4mm thick and internal PMMA diffuser.  
 High efficiency homogeneous light. Light color 5000K.  
 Integrated driver LED system.  
 24VDC power supply.  
 M12 4P (M) for electrical connection.  
 Four length version available.

## TECHNICAL FEATURES


Model	Power supply	Power Watt	Current	Light color	Beam	Lumen led	Weight
HERIONOVA.27.50	24 VDC	27 W	1,2 A	5000 K - CRI75	120°	2800 lum	1,60 Kg ~
HERIONOVA.42.50	24 VDC	42 W	1,8 A	5000 K - CRI75	120°	4200 lum	2,20 Kg ~
HERIONOVA.68.50	24 VDC	68 W	2,9 A	5000 K - CRI75	120°	7000 lum	3,30 Kg ~
HERIONOVA.96.50	24 VDC	96 W	4,0 A	5000 K - CRI75	120°	9800 lum	4,45 Kg ~

## Mechanical features


Structure  
 Frontal glass  
 Internal diffuser  
 Fastening  
 Electrica connection  
 Operating temperature

anodized aluminum  
 Transparent tempered 4mm thick  
 in PMMA  
 side plates / Adjustable rear mounting  
 M12 4P (M) connector  
 min -20° C - max +55° C


## DIMENSIONS (all values in millimeters)

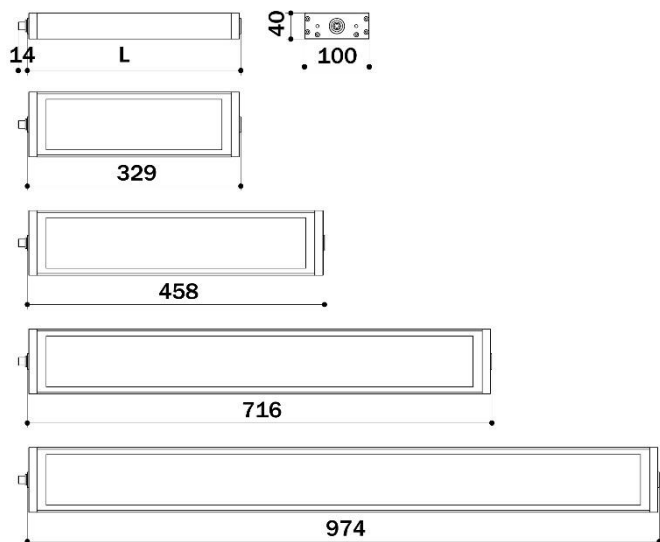

## FASTENING ACCESSORIES



**HERIONOVA.FX01**  
 Stainless steel fastening plates 2mm thick – 45° lamp rotation.



**HERIONOVA.FX02**  
 Rear Fastening kit for HERIONOVA.